

PURSUIT®

DC 265



PERFORMANCE DATA

RPM	MPH	GPH	MPG	RANGE*
600	1.5	0.7	2.14	289
1000	4.5	1.3	3.60	486
1500	7.5	2.2	3.49	471
2000	9.5	3.6	2.64	356
2500	10.5	5.4	1.94	263
3000	14.5	6.5	2.25	303
3500	21.0	8.6	2.44	330
4000	30.0	11.8	2.55	345
4500	35.5	16.5	2.15	290
5000	41.0	20.0	2.05	277
5500	44.0	25.2	1.75	236
5900	46.0	27.0	1.70	230

*Range based on 90% Fuel Capacity


DC265 SPECIFICATIONS

L.O.A.	25' 10"
Beam	8' 9"
Hull Draft (motors up)	19"
Hull Draft (motors down)	37"
Fuel Capacity	150 U. S. gallons
Max. Horsepower	350
Average Dry Weight (w/ 300)	6,050 lbs.
Water Capacity	18 U. S. gallons
Clearance w/o Hardtop	6' 2"
Clearance w/ Hardtop**	8' 2"
Deadrise	21°

YAMAHA POWER

Outboard Model	Single F300 (V-6)
Outboard Dry Weight	558 lbs.
Mounting Hole	#2
Optimum Prop.	15-1/2" x 17" SWS II XL SDS

**Hardtop Clearance shown does not include options which could increase this height dimension.

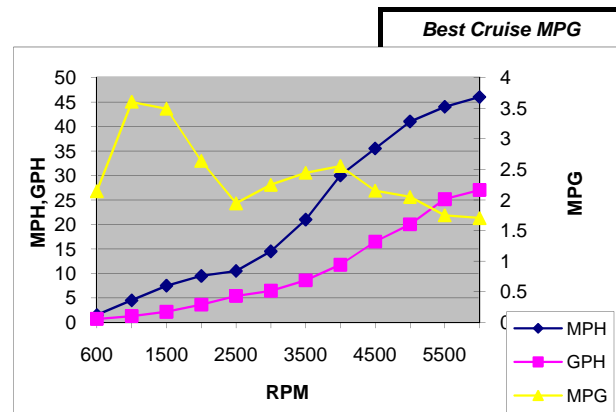

0 to 30mph Acceleration = 8.2 sec.

TEST CONDITIONS

Full Boat Test Weight	7,610 lbs.***
Test Personnel	3
Air/Water Temperature	92° / 82°

***Test Weight includes full fuel, full water, all optional equipment, personnel, and safety gear.

Note: Data may vary due to changes in weather, elevation, options, load and bottom conditions.

Fuel data gathered with Yamaha Fuel Management System. Speed data gathered with GPS.

