

PURSUIT®

C 280




PERFORMANCE DATA

| RPM | MPH | GPH | MPG | RANGE* |
|-------------|-------------|-------------|-------------|------------|
| 600 | 4.0 | 1.2 | 3.33 | 660 |
| 1000 | 5.0 | 2.3 | 2.22 | 440 |
| 1500 | 7.5 | 3.9 | 1.92 | 381 |
| 2000 | 9.5 | 6.4 | 1.50 | 296 |
| 2500 | 10.0 | 9.7 | 1.04 | 205 |
| 3000 | 15.5 | 12.2 | 1.28 | 253 |
| 3500 | 30.5 | 14.4 | 2.13 | 421 |
| 4000 | 36.5 | 20.4 | 1.79 | 354 |
| 4500 | 41.0 | 25.1 | 1.64 | 324 |
| 5000 | 47.0 | 31.5 | 1.49 | 295 |
| 5500 | 52.0 | 38.1 | 1.37 | 271 |
| 5900 | 55.5 | 44.2 | 1.26 | 249 |

* Range based on 90% Fuel Capacity

Best Cruise MPG

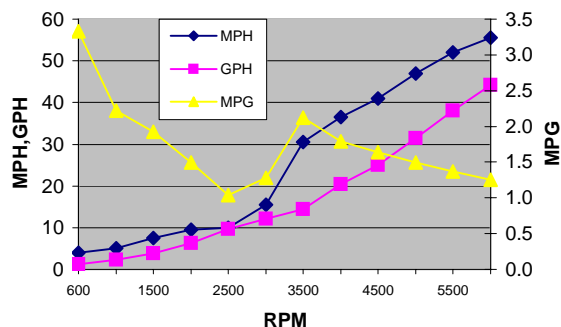

0 to 30mph Acceleration = 8.2 sec.

C280 SPECIFICATIONS

| | |
|---------------------------------|-------------------|
| L.O.A. | 28' 0" |
| Beam | 9' 6" |
| Hull Draft (to bottom of props) | 19" |
| Hull Draft (engines up) | 34" |
| Fuel Capacity | 220 U. S. gallons |
| Max. Horsepower | 500 |
| Average Dry Weight (w/twin 250) | 7,300 lbs |
| Holding Tank Capacity | 20 U. S. gallons |
| Water Capacity | 20 U. S. gallons |
| Clearance w/o Hardtop | 6' 3" |
| Clearance w/ Hardtop** | 7' 8" |
| Deadrise | 24° |

YAMAHA POWER

| | |
|--------------------------|------------------|
| Outboard Model | Twin F250 (V-6) |
| Outboard Dry Weight | 592 lbs. each |
| Mounting Hole | #2 |
| Optimum Performance Prop | 15" x 21" SWS II |

**Hardtop Clearance shown does not include options which could increase this height dimension.

TEST CONDITIONS

| | |
|-----------------------|---------------|
| Full Boat Test Weight | 9,432 lbs.*** |
| Test Personnel | 2 |
| Air/Water Temperature | 87° / 86° |

***Test Weight includes full fuel, full water, all optional equipment, personnel, and safety gear.

Note: Data may vary due to changes in weather, elevation, options, load and bottom conditions.

Fuel data gathered with Yamaha Fuel Management System.
Speed data gathered with GPS.


PURSUIT
Ultimately, There Is Pursuit